


RELAY CONTROL UNIT

NEF[®]

RELAY CONTROL UNIT

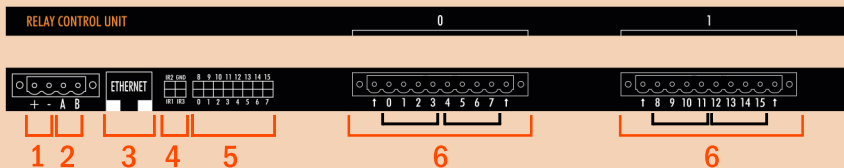

CONNECTIONS

- 1. POWER INPUT:** The device works with 12-24 V. DC supply.
- 2. COMMUNICATION:** It has communication protocol in RS-485 system.
- 3. ETHERNET:** If there is an ethernet module on the control card, an ethernet socket is plugged here.
- 4. IR REMOTE CONTROL :** Each control card with IR module has three control outputs.
Three different remote controls can be added to the system.
- 5. TRIGGER INPUTS:** It is the section with adjustable digital inputs of the control card. "-" Triggers (GND).
- 6. RELAY CHANNEL CONNECTIONS :** Places with arrow signs are common entrance terminals.
The first four channels are connected to the common first terminal. The last four channels are connected to the common last terminal.