


SINGLE ENGINE CONTROL UNIT

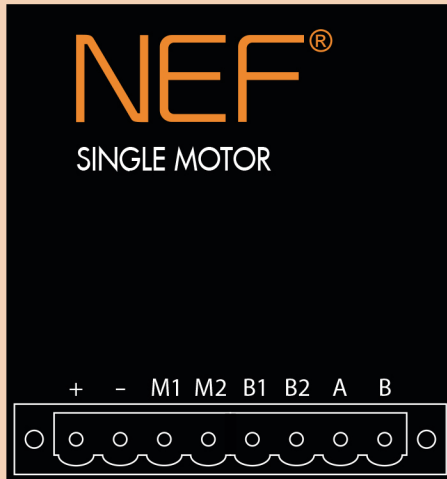

CONNECTIONS

POWER INPUT(+ -): The device works in the range of 12-24V. It has a digital current sensor.

M1/M2: They are motor connectors.

ETHERNET: If ethernet is installed on the control card, ethernet control is here.

IR REMOTE CONTROL: Each control card with an IR module has three control outputs, and each
Three controllers can be added to the module.

B1/B2: Button trigger tips." Triggers (GND).

AB: It has communication protocol in RS-485 system.